

CLASS 125

BRASS GATE VALVE


Screwed Bonnet, Non-rising Stem
Threaded ends to BS21 (JIS B0203) or NPT,
or solder joint ends.

W.O.G. non-shock 1.38 MPa (200 psi), Saturated steam pressure 0.86 MPa (125 psi)



Fig. FH

• Threaded end to BS21 (JIS B0203)

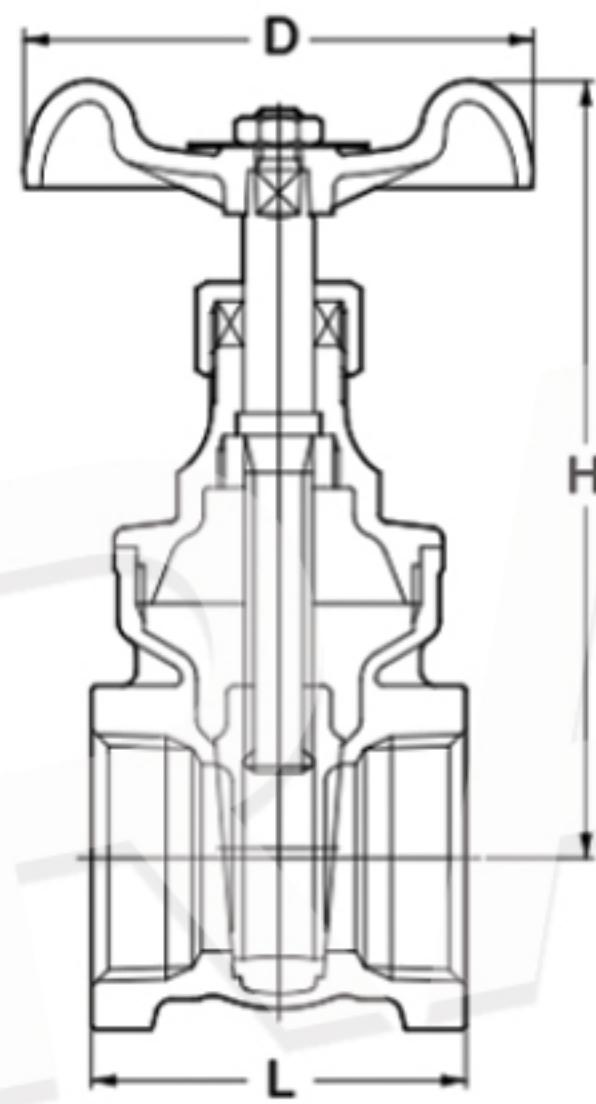

Materials

Parts	Material
Body	Brass
Bonnet	Brass
Stem	Dezincification Resistant Brass
Disc	Brass
Gland Packing	Aramid Fibers Graphite

⚠ Solder joint end valves should not be used in service where the temperature of line fluid is higher than the softening point of solder.

⚠ Don't use for Flammable gas or Toxic gas.

Dimensions

Nominal Size	inch	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	mm
	mm	8	10	15	20	25	32	40	50	65	80	
L		35	38	42	47	50	60	63	72	82	92	
L1 Solder			37	45	60	70	77	86	104	115	127	
H		70	73	73	87	97	118	126	154	187	205	
D		50	50	50	55	60	70	80	90	100	115	