


# NR 101 เชื้อควาล์วสปริง รุ่น Block

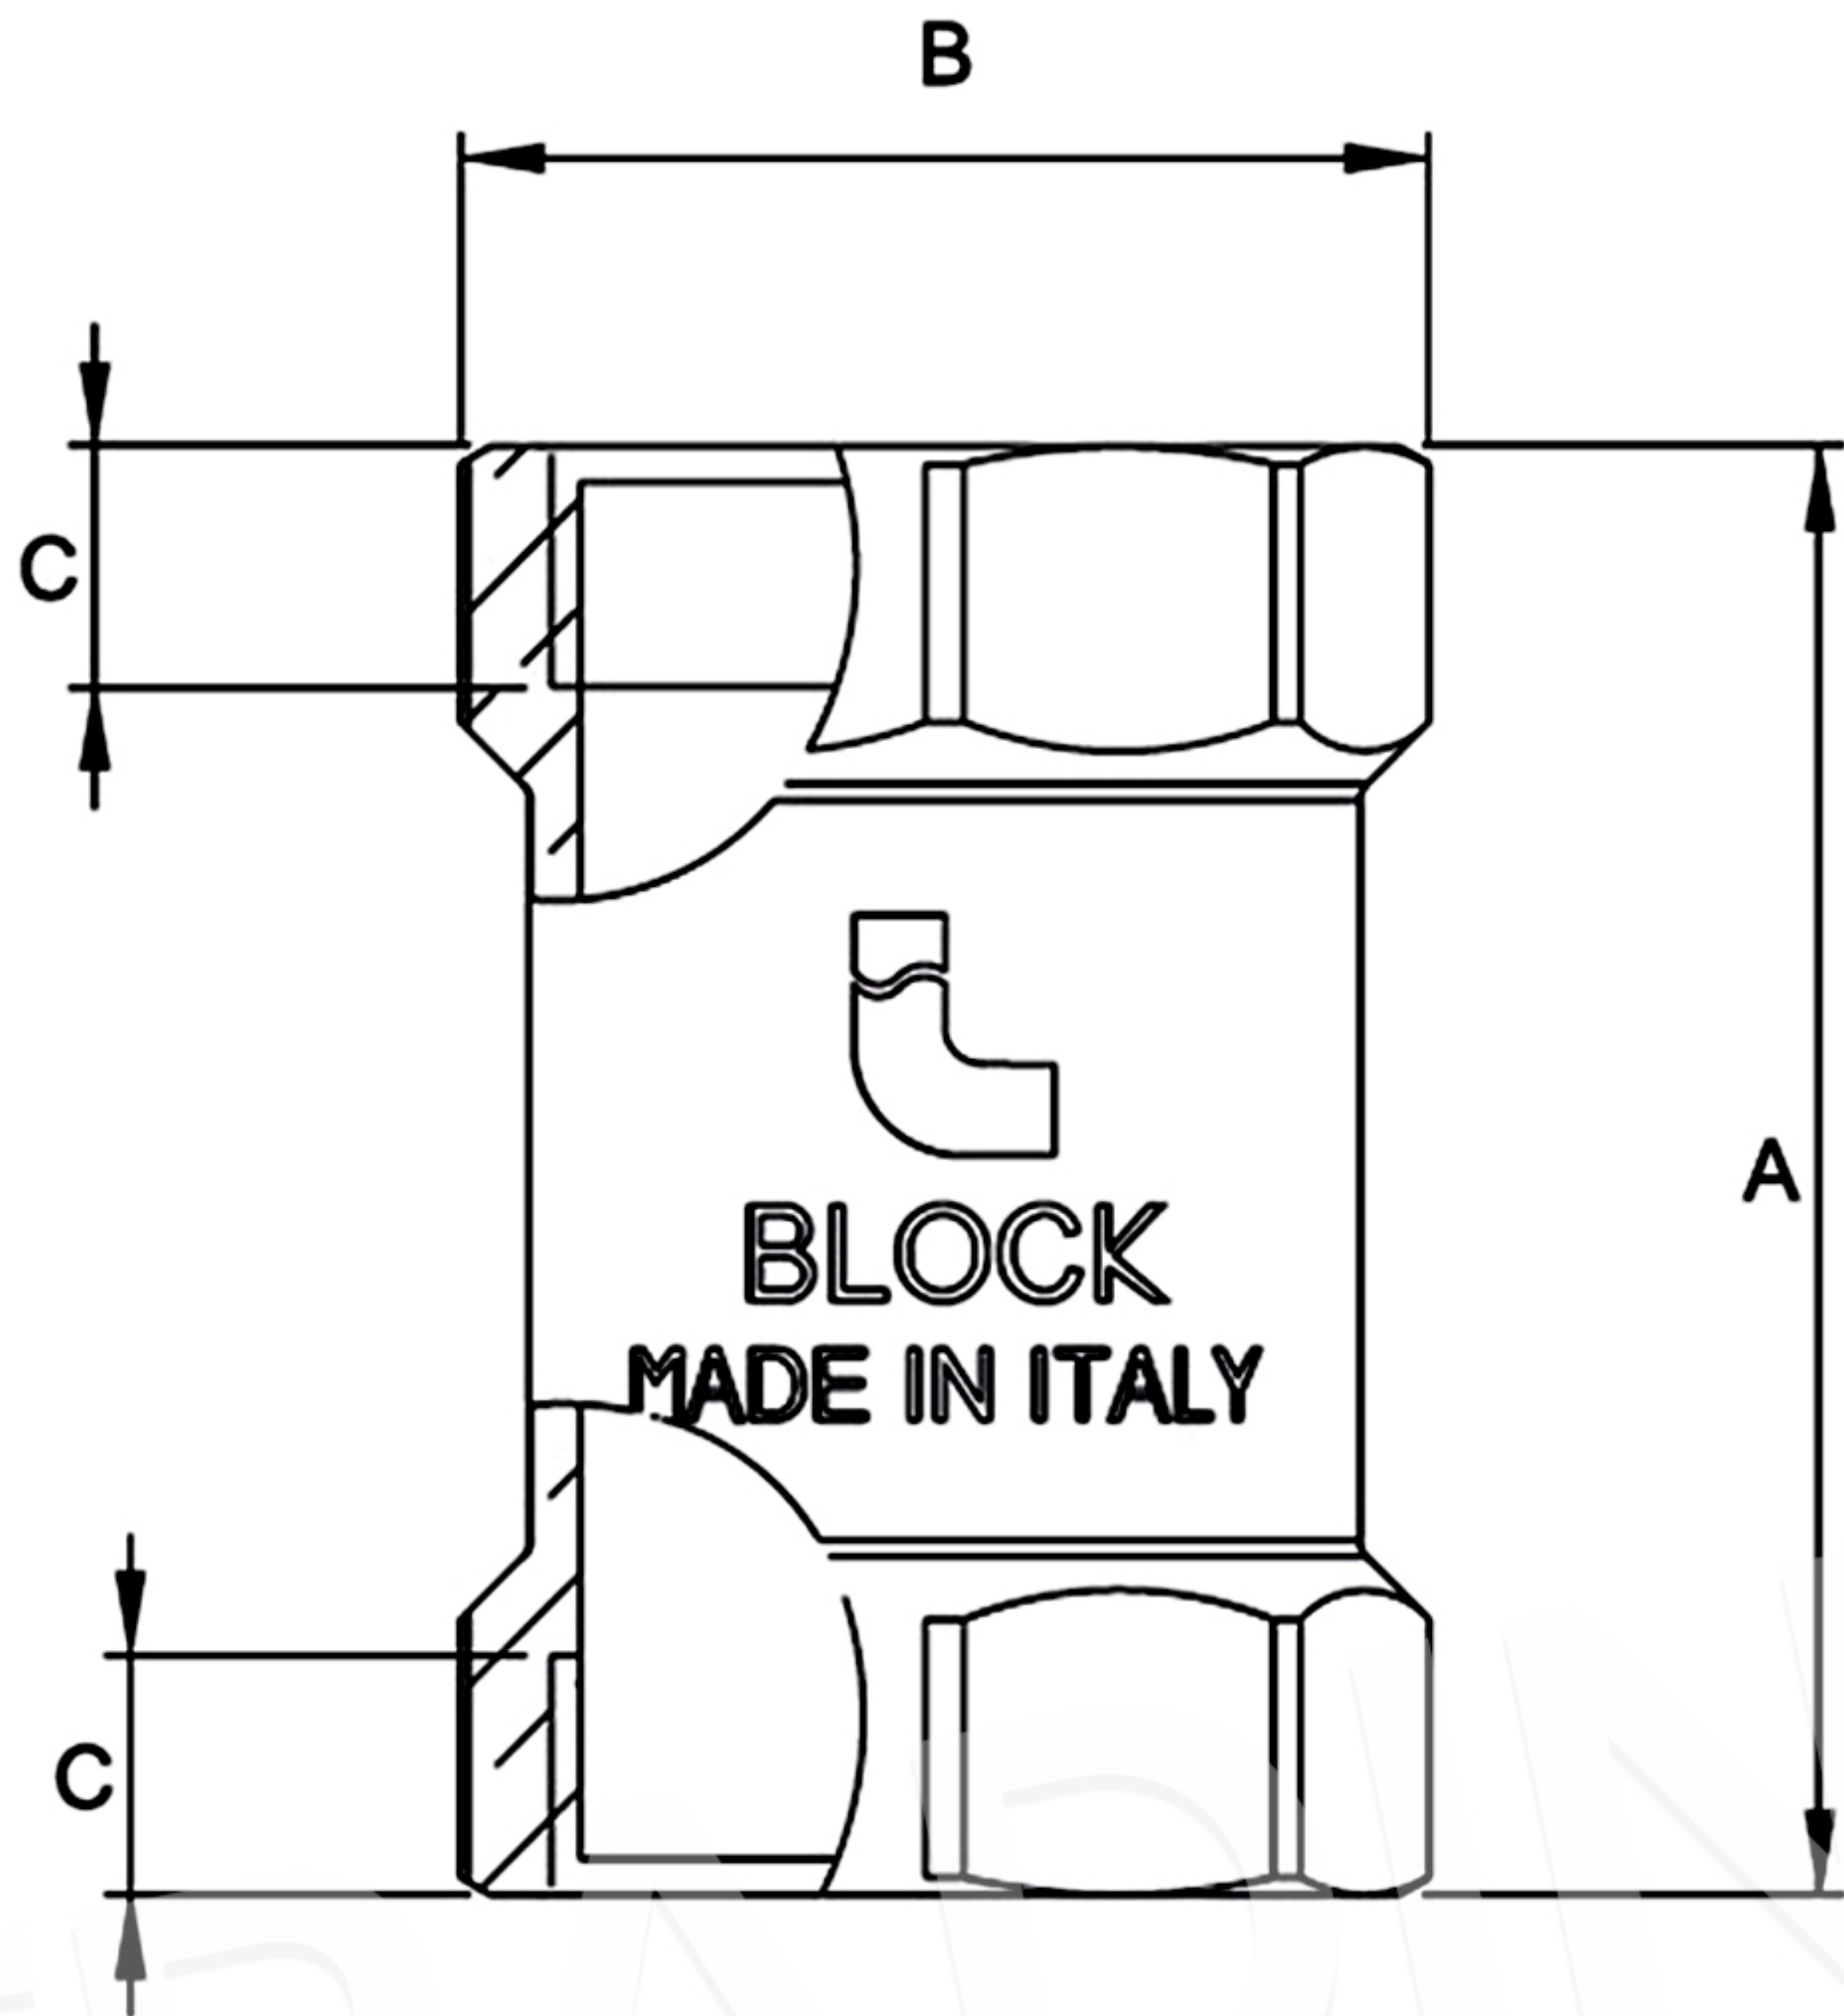

| Dimensioni<br>in mm                         | 1/4" | 3/8" | 1/2" | 3/4" | 1"   | 1.1/4" | 1.1/2" | 2"   | 2.1/2" | 3" | 4" |
|---------------------------------------------|------|------|------|------|------|--------|--------|------|--------|----|----|
| A                                           |      |      | 47.5 | 53.5 | 60.5 | 66.5   | 74     | 80   |        |    |    |
| B                                           |      |      | 28   | 35   | 40.5 | 50.4   | 57.8   | 70.5 |        |    |    |
| C                                           |      |      | 9    | 10   | 10   | 12     | 13     | 15   |        |    |    |
| D                                           |      |      | 14   | 18   | 22   | 28     | 33     | 44   |        |    |    |
| E                                           |      |      |      |      |      |        |        |      |        |    |    |
| F                                           |      |      |      |      |      |        |        |      |        |    |    |
| G                                           |      |      |      |      |      |        |        |      |        |    |    |
| Press. atmosfere<br>Kg/cm <sup>2</sup> -bar |      |      | 12   | 12   | 12   | 10     | 10     | 10   |        |    |    |
| LBS Working<br>pressure -psi                |      |      | 170  | 170  | 170  | 145    | 145    | 145  |        |    |    |