
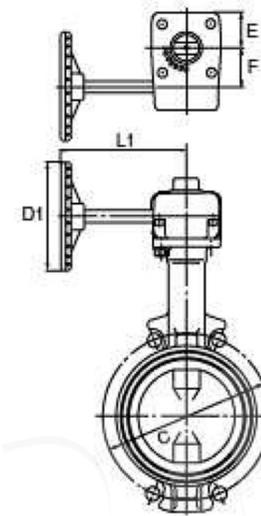


**Wafer Type**

**EN 16 Design - Gear Operated**

**G-PN16DJE**

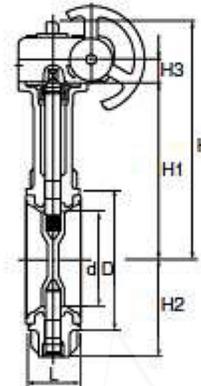

**Dimensions (PN16)**

unit : mm

| Size |      | d   | H   | H1  | H2  | H3 | L   | D   | C    | D1   | L1   | E  | F   |
|------|------|-----|-----|-----|-----|----|-----|-----|------|------|------|----|-----|
| mm   | inch |     |     |     |     |    |     |     | PN16 | PN16 | PN16 |    |     |
| 50   | 2    | 50  | 194 | 147 | 67  | 19 | 43  | 90  | 125  | 80   | 122  | 29 | 28  |
| 65   | 2½   | 65  | 202 | 155 | 75  | 19 | 46  | 104 | 145  | 80   | 122  | 29 | 28  |
| 80   | 3    | 80  | 236 | 173 | 91  | 24 | 46  | 124 | 160  | 110  | 135  | 36 | 40  |
| 100  | 4    | 100 | 246 | 183 | 101 | 24 | 52  | 146 | 180  | 110  | 135  | 36 | 40  |
| 125  | 5    | 125 | 274 | 211 | 127 | 24 | 56  | 176 | 210  | 110  | 150  | 36 | 40  |
| 150  | 6    | 150 | 286 | 223 | 139 | 24 | 56  | 206 | 240  | 110  | 150  | 36 | 40  |
| 200  | 8    | 197 | 325 | 248 | 169 | 32 | 60  | 257 | 295  | 170  | 180  | 51 | 63  |
| 250  | 10   | 246 | 381 | 304 | 219 | 32 | 68  | 312 | 355  | 250  | 250  | 51 | 63  |
| 300  | 12   | 295 | 406 | 329 | 244 | 32 | 78  | 364 | 410  | 250  | 250  | 51 | 63  |
| 350  | 14   | 334 | 461 | 360 | 309 | 60 | 78  | 407 | 470  | 360  | 350  | 68 | 89  |
| 400  | 16   | 385 | 516 | 415 | 348 | 60 | 102 | 466 | 525  | 360  | 350  | 68 | 89  |
| 450  | 18   | 434 | 540 | 439 | 372 | 60 | 114 | 522 | 585  | 360  | 350  | 68 | 89  |
| 500  | 20   | 482 | 623 | 488 | 423 | 65 | 127 | 575 | 650  | 500  | 400  | 90 | 134 |
| 600  | 24   | 579 | 671 | 536 | 472 | 65 | 154 | 680 | 770  | 500  | 400  | 90 | 134 |

Disc and seat material coding.