# สปริงเช็ควาล์ว

## Spring Check Valve

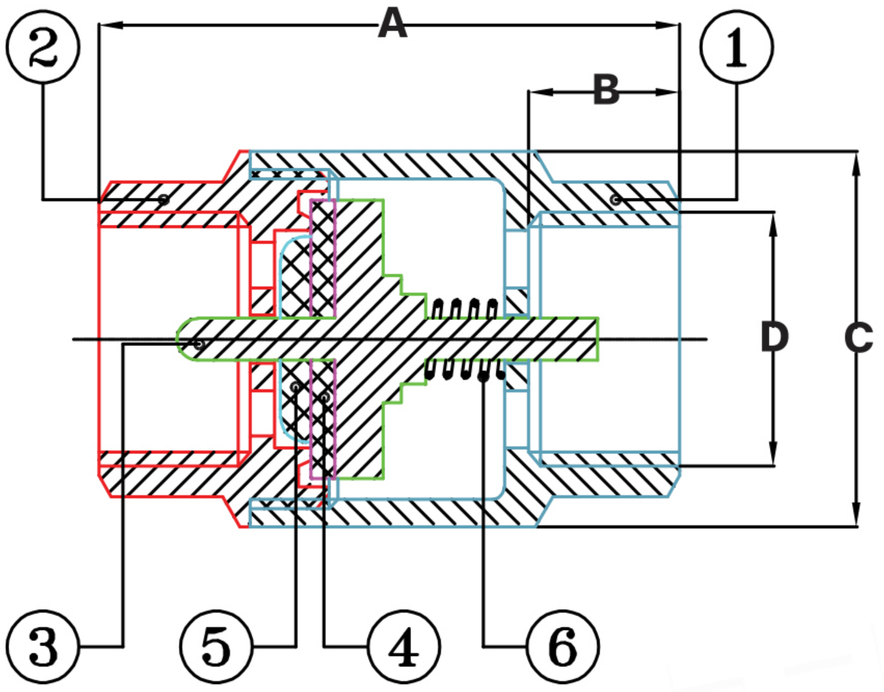

## Dimensions

**PN 16**

| Model | Size | A | B | C | D | E |
|---|---|---|---|---|---|---|
| SCV 15 | 1/2" | 48 | 12.5 | 33 | CH 26 | PS 1/2" |
| SCV 20 | 3/4" | 53 | 12.5 | 40 | CH 32 | PS 3/4" |
| SCV 25 | 1" | 58 | 13.5 | 47 | CH 38 | PS 1" |
| SCV 32 | 1.1/4" | 66.5 | 13.5 | 59.5 | CH 47 | PS 1.1/4" |
| SCV 40 | 1.1/2" | 74 | 16 | 70.5 | CH 55 | PS 1.1/2" |
| SCV 50 | 2" | 80.5 | 16.5 | 86 | CH 66 | PS 2" |

## Materials

| ชิ้นส่วน | วัสดุ |
|---|---|
| 1. Body | Brass |
| 2. Cover | Brass |
| 3. Stem | Nylon |
| 4. Seat | NBR |
| 5. Plate | Nylon |
| 6. Spring | Stainless Steel |

## สปริงเช็ควาล์ว

สปริงเช็ควาล์วทองเหลืองคุณภาพสูง เป็นวาล์วกันน้ำไหลย้อนกลับ ทำหน้าที่ควบคุมน้ำให้ไหลไปได้ในทิศทางเดียว โดยน้ำจะไหลผ่านวาล์วได้ในทิศทางที่น้ำไหลเข้า ถ้ามีแรงดันของน้ำไหลย้อนกลับมากลไกสปริงของวาล์วจะปิดลงทันทีโดยอัตโนมัติเหมาะกับการติดตั้งกับระบบปั๊มน้ำและระบบประปาทั่วไป สามารถติดตั้งได้ทั้งแนวนอนและแนวตั้ง สปริงเช็ควาล์วทุกชิ้นผ่านการทดสอบการรั่วซึมและแรงดันน้ำก่อนออกจำหน่าย

## Spring Check Valve

Spring check valve is a high-quality brass product. It functions for controlling the water flow into the same direction. The spring mechanism inside will be shut automatically if there is any reverse water flow in the pipeline. This product is suitable for connecting with water pump and water supply systems. It is designed for both horizonal and vertical installations. Every single piece of spring check valve has been tested for leakage and water pressure before distribution.

SANWA®
HIGH QUALITY WATERWORKS PRODUCT