


# CHECK VALVE



## STAINLESS STEEL SPRING CHECK VALVE SCREWED ENDS

### FEATURE AND APPLICATION

- Design & Manufacture : ASTM B16.34
- The valve are designed to prevent reverse flow automatically
- Spring load type disc
- Spring & Stem in stainless steel
- Applicable Medium : Water, Oil, Gas, Steam, Chemical
- Screwed end BSPT Connection
- Max.Working Pressure : 800 PSI (55 Bar)
- Max.Working Temperature : -20 °C To 180 °C
- Size Range : 1/2" - 2"

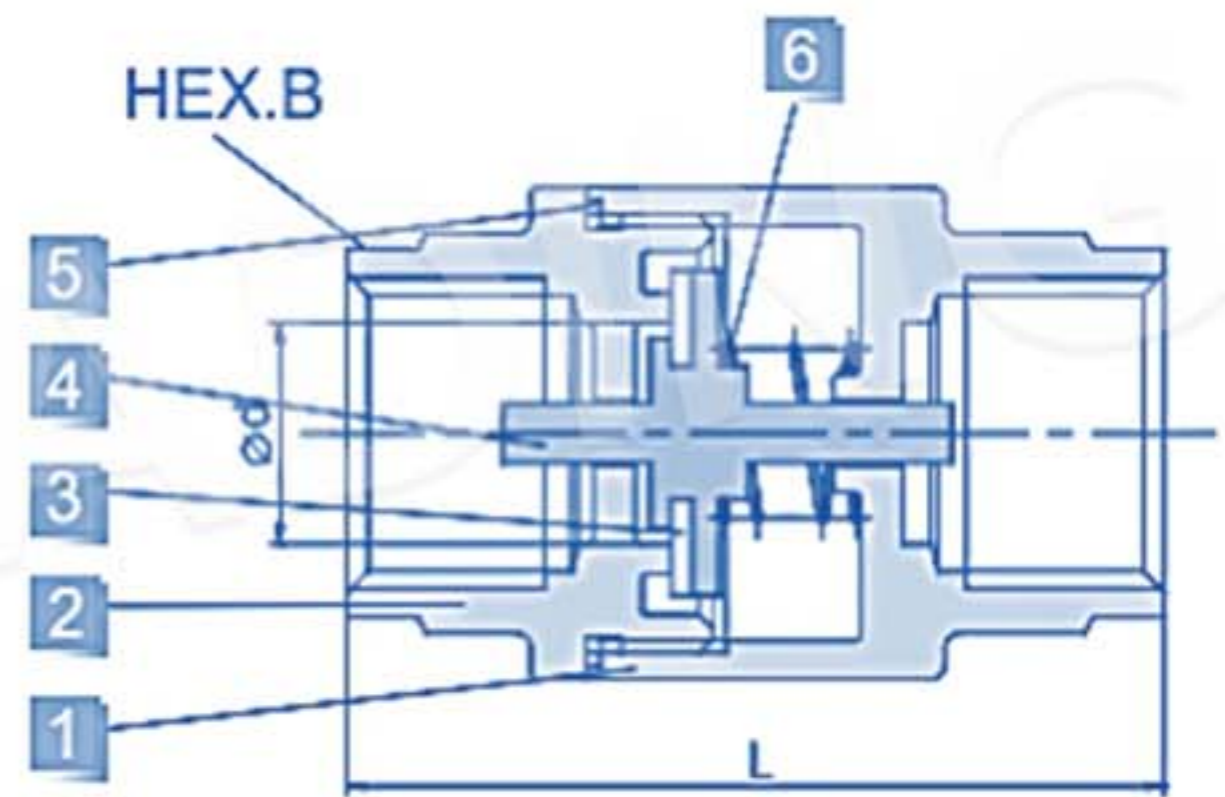

### Bill of Materials

Seqyebce	Description	Material	Sizes
1	Body	SUS 304	All
2	Cap	SUS 304	All
3	Seat	PTFE	All
4	Disc	SUS 304	All
5	Gasket	PTFE	All
6	Spring	SUS 304	All

### Dimensions

mm

DN	INCH	d	L
15	1/2"	15	58
20	3/4"	20	70
25	1"	25	80
32	1-1/4"	32	88
40	1-1/2"	40	102
50	2"	50	115