


MODELS 7160 END CAP

Shurjoint grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer’s standard.

Shurjoint standard fitting pressure ratings conform to the ratings of Model 7707 couplings.

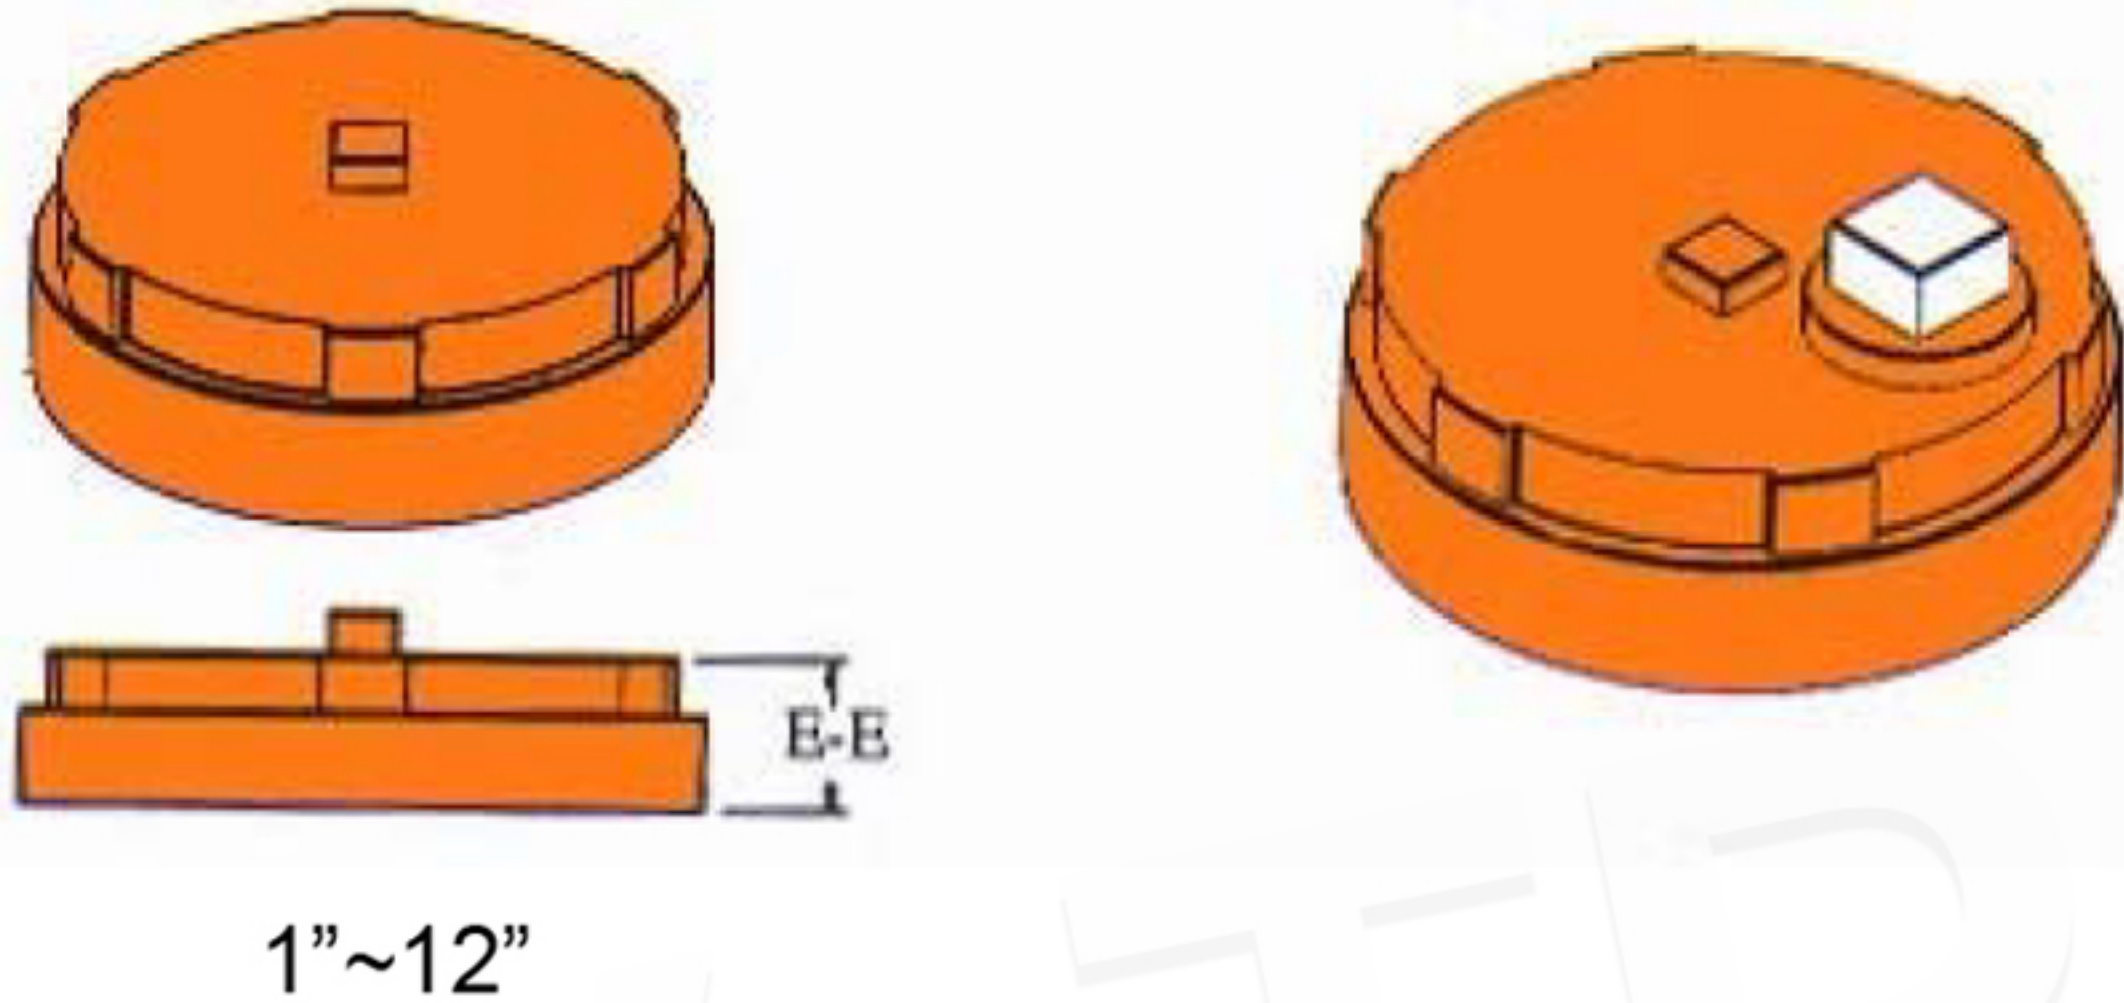

Model 7160



Full warranty terms
can be found on
www.shurjoint.com

Models 7160 End Cap			
Nominal Pipe Size	Pipe O.D.	7160 End Cap	
in mm	in mm	E-E in / mm	Lbs Kgs
1	1.315	0.87	0.2
25	33.4	22	0.1
1¼	1.660	1.00	0.3
32	42.2	25	0.2
1½	1.900	1.00	0.4
40	48.3	25	0.2
2	2.375	1.00	0.7
50	60.3	25	0.3
2½	2.875	1.00	0.9
65	73.0	25	0.4
76.1 mm	3.000	1.00	0.9
	76.1	25	0.4
3	3.500	1.00	1.5
80	88.9	25	0.7
108.0 mm	4.250	1.00	2.4
	108.0	25	1.1
4	4.500	1.00	2.2
100	114.3	25	1.0
133.0 mm	5.250	1.00	3.7
	133.0	25	1.7
139.7 mm	5.500	1.00	3.7
	139.7	25	1.7
5	5.563	1.00	3.7
125	141.3	25	1.7

Models 7160 End Cap			
Nominal Pipe Size	Pipe O.D.	7160 End Cap	
in mm	in mm	E-E in / mm	Lbs Kgs
159.0 mm	6.250	1.00	5.1
	159.0	25	2.3
165.1 mm	6.500	1.00	6.0
	165.1	25	2.7
6	6.625	1.00	6.0
150	168.3	25	2.7
8	8.625	1.18	10.1
200	219.1	30	4.6
10	10.750	1.25	15.4
250	273.0	32	7.0
12	12.750	1.25	22.0
300	323.9	32	10.0
200 JIS	8.516	1.18	10.1
	216.3	30	4.6
250 JIS	10.528	1.25	15.4
	267.4	32	7.0
300 JIS	12.539	1.25	22.0
	318.5	32	10.0